

Tổng hợp

Role hẹn giờ ER-XX và ERV-XX được sử dụng trong tất cả các khu vực phụ thuộc thời gian (công nghiệp, nhà ở, nhà máy, v.v.) cần được kiểm soát.

Nguyên tắc sử dụng và làm việc của thiết bị


Hãy làm theo sơ đồ nối dây.
Hãy điều chỉnh thời gian trễ bằng núm.
Cấp nguồn cho thiết bị. Thiết bị sẽ tính thời gian chờ. Khi thời gian trễ bắt đầu, đèn báo nguồn sẽ sáng (On) và đầu ra tiếp điểm là (NC) 1. Khi hết thời gian trễ, đèn LED role (Out) bật và đầu ra tiếp điểm là (NO) 3. Thiết bị vẫn còn nguyên cho đến khi mất điện.

Bảo trì

Tắt thiết bị và rút khỏi tất cả các kết nối. Làm sạch thân của thiết bị bằng tăm bông.
Không sử dụng bất kỳ vật dẫn hoặc hóa chất vì có thể làm hỏng thiết bị.
Đảm bảo thiết bị hoạt động bình thường sau khi vệ sinh.

Cảnh báo

- Vui lòng sử dụng thiết bị theo hướng dẫn.
- Không sử dụng thiết bị trong môi trường ẩm ướt.
- Bao gồm một công tắc và bộ ngắt mạch trong cụm.
- Đặt công tắc và bộ ngắt mạch gần thiết bị, người vận hành có thể tiếp cận dễ dàng.
- Đánh dấu công tắc và bộ ngắt mạch để giải phóng kết nối cho thiết bị.

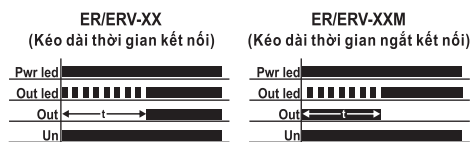


Các chỉ tiêu kỹ thuật:


Điện áp làm việc (Un): 150V-260VAC
Tần suất làm việc: 50/60 Hz.
Công suất hoạt động: 4VA
Nhiệt độ làm việc: -20°C... +55°C
Thời gian (t): 0,1 giây-60 phút.
Hiện thị: (mở ra) chỉ báo nguồn và chỉ báo role (đầu ra)
Kiểu kết nối: kết nối đầu cuối
Trọng lượng: Max. 90gr.
Tiếp điểm: 5A/250V AC (Resistive Load)
Cài đặt lắp đặt: Cài đặt đọc trong bảng điều khiển hoặc trên đường ray DIN
Độ cao làm việc: <2000 meter
Đường kính cáp: 2.5mm²

Liên hệ: www.samwha-dsp.com info@samwha-dsp.com


Sơ đồ kết nối ERV-XX

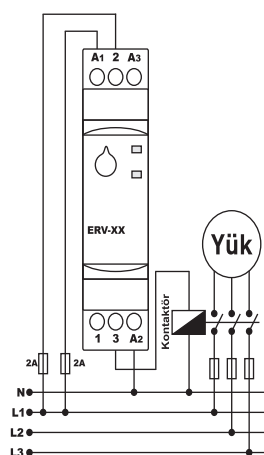


Sơ đồ kết nối ER-XX

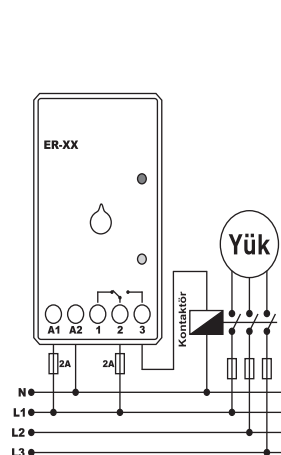

Kích thước ER-XX

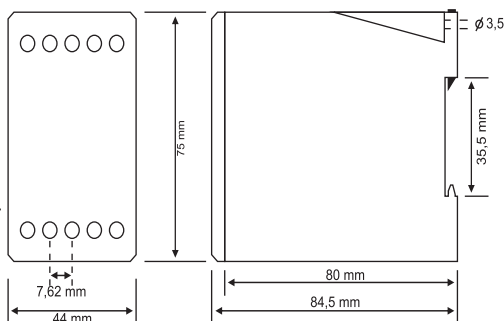

Kích thước ERV-XX

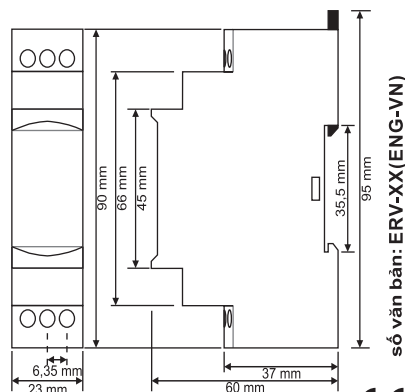

MADE IN CHINA

số văn bản: ERV-XX(ENG-VN)

General

ER-XX and ERV-XX timer relays are used in all fields (industry, house, plant etc.) need controls related to the time.

Usage of Device and Working Principle


Please make the connection according to the diagram. Please adjust the delaying time by the button. Energize the device. Device will count the stand by time. On(power) led gets on when the counting occurs, Out(relay) led gets on and off. During this step contact output is (NC)1. After the time is up Out(relay) led gets on constantly and contact out put gets into (NO)3. Until it is de-energized device remains the same.

Maintenance

Switch off the device and release from connections. clean the trunk of device with a swab. Don't use any conductor or chemical might damage the device. make sure device works after cleaning.

Warnings

Please use the device according to the manual. Don't use the device in wet. Include a switch and circuit breaker in the assembly. Put the switch and circuit breaker nearby the device, operator can reach easily. Mark the switch and circuit breaker as releasing connection for device.

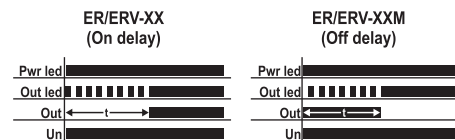


Technical Specifications:


Operating Voltage(Un): 150V - 260V AC
Operating Frequency: 50/60 Hz.
Operating Power: <4VA
Operating Temperature: -20°C... +55°C
Time(t): 0,1sec. - 60min.
Display: On led and Out(RLY) led
Connection Type: Terminal connection
Weight: Max. 90gr.
Contact: 5A/250V AC (Resistive Load)
Mounting: Vertical assembled in the panel or assembled on the din rail
Operating Altitude: <2000meter
Cable Diameter: 2.5mm²

Liên hệ: www.samwha-dsp.com info@samwha-dsp.com


Connection diagram for ERV-XX

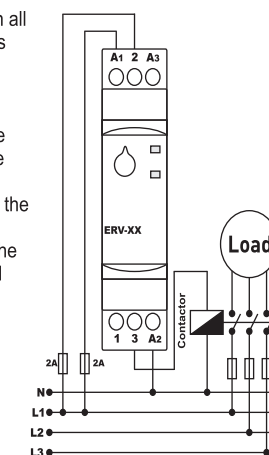


Connection diagram for ER-XX

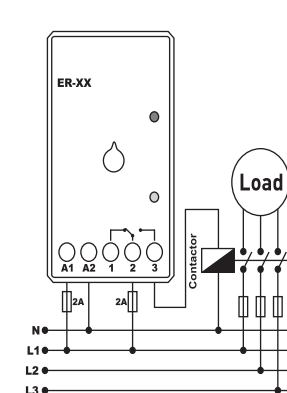

Dimensions for ER-XX

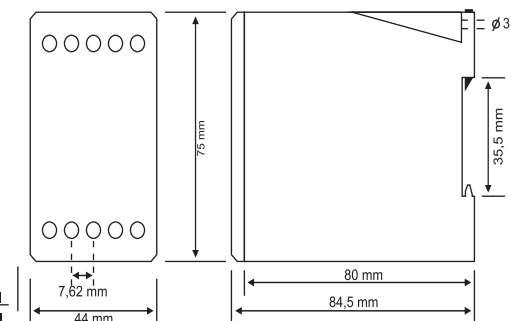

Dimensions for ERV-XX

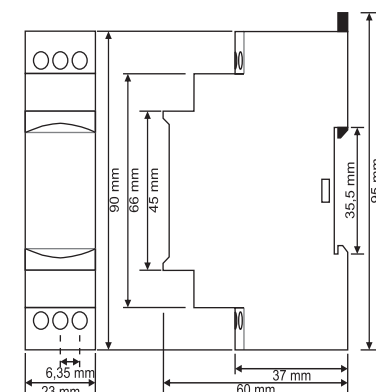

MADE IN CHINA

Document Number: ERV-XX(ENG-VN)