





Rated Load	A/VAC	6/300
Dielectric Strength	V/S	4000
	V/S	2000
Wire Size	AWG/mm ²	20-16/0.5-1.5
Tightening Torque	Nm	0.5
Terminal Ingress Protection		IP20

Socket	A1.A2 Input Voltage	Relay Coil Voltage
PBF05-E 6-24V	6-24VAC/DC	6-24VDC
PBF05-E 48-60V	48-60VAC/DC	48-60VDC
PBF05-E 110V	110VAC/DC	48VDC
PBF05-E 230V	230VAC/DC	60VDC

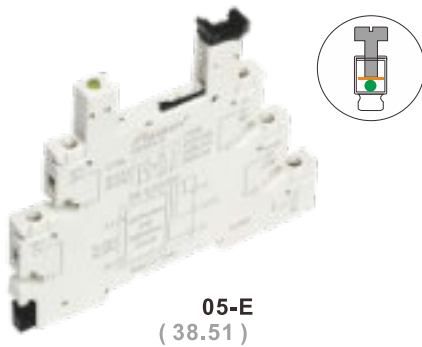